
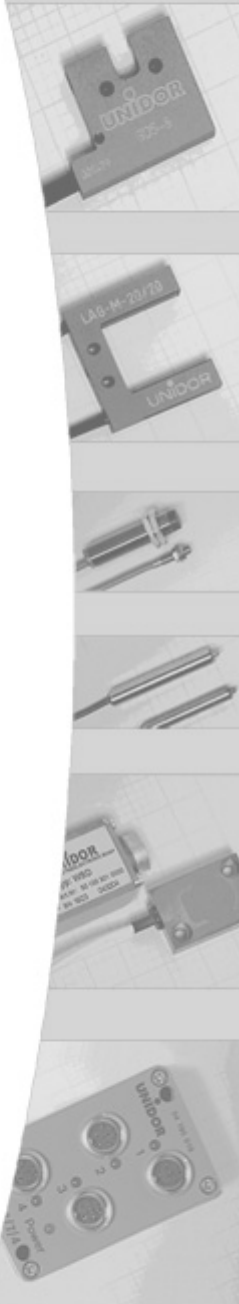


IR-Fork Frame Light Barrier

LAG M20 Series

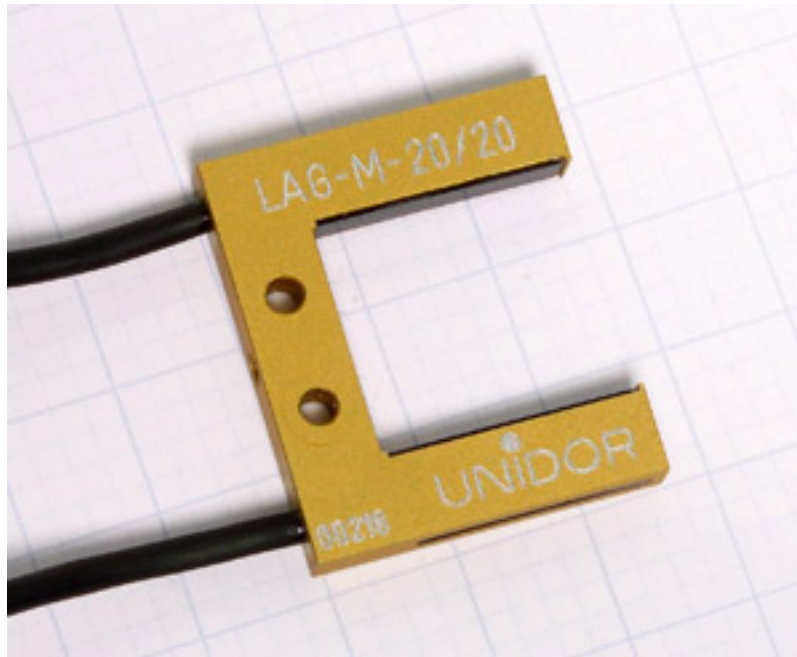

Application

Frame light barriers of the LAG-M Series are used wherever ultra-small, non-guided parts need to be detected from a size of 0,2mm. When the measuring object passes the light curtain, it triggers a voltage pulse, which is adjustable by a step switch between 20 to 300ms. With their sturdy housing and high type of protection the LAG-M Series are designed for sophisticated applications in the machine building industry.

The sensor is connected via an 8pin-plug to the external amplifier FLB CON1-Q.

With the optional analog output it can be used for measuring technique.

Technical features

- Very small type
- High sensitivity (parts > 0,3mm)
- Insensitive to external effect of light
- External amplifier with adjustable pulse length and sensitivity
- Dirt accumulation compensation with indicator (yellow)
- Switching state indicator (green/red)
- Oil-resistant PUR-cable
- Scratch-resistant optic

Option

- Analog output 0-10 Volt
- Switching output NPN

TRsystems GmbH
 Freiburger Str. 3
 D-75179 Pforzheim

Tel +49(0)7231/3152-0
 Fax +49(0)7231/3152-99
 unidor@trsystems.de
 www.trsystems.de

IR-Fork Frame Light Barrier


LAG M20 Series

Technical Data


Voltage supply:	+12VDC... +32VDC
Max. range:	Typ. 200mA
Transmitter:	IR-Type
Min. visible part:	0,2mm
Ambient light:	Up to 5000 Lux
Max. switching current:	PNP dynamic, 200mA max. (optional NPN)
Pulse length Z for switching output:	Adjustable in 20/50/100/200 oder 300ms
Switching state indication:	LED green/red
Dirt accumulation indication:	LED yellow
Sensitivity E:	Part size in 5 steps
Switching frequency:	1 kHz
Housing: / Enclosure rating:	Aluminium, gold coloured anodized / IP 67

Dimensions/Configuration:

Frame Light Barrier

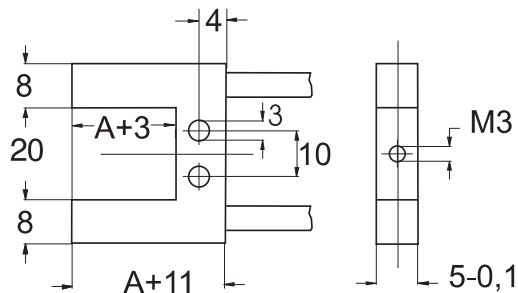


Amplifier FLB-CON 1-Q

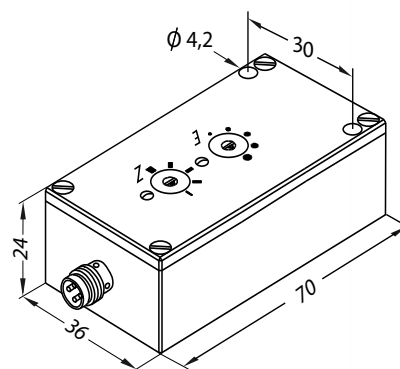

Fork type	A
20/10	10
20/15	15
20/20	20
20/25	25
20/40	40
20/50	50

Pin-No.	4pin. M8 Plug	Cable colour
1	+ UB (12-32VDC)	brown
2	n.c. (opt. analog)	white
3	GND	blue
4	PNP dyn. (High-signal at free beam)	black

Sensor with amplifier

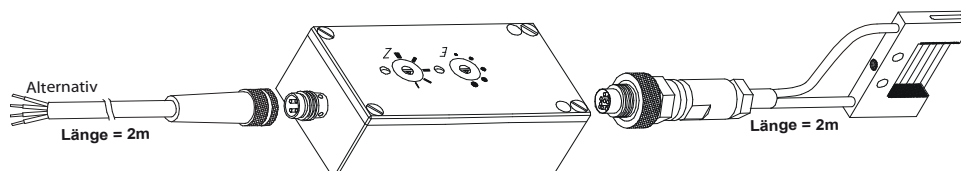

TRsystems GmbH
 Freiburger Str. 3
 D-75179 Pforzheim

Tel +49(0)7231/3152-0
 Fax +49(0)7231/3152-99
 unidor@trsystems.de
 www.trsystems.de

IR-Fork Frame Light Barrier

LAG M20 Series



SENSOREN

Order Data

Article-No.	Short term	Description
51019266	LAG-M20/10	Frame type sensor LAG-M 20/10 – cable-length = 1m
51019267	LAG-M20/15	Frame type sensor LAG-M 20/15 – cable-length = 1m
51019268	LAG-M20/20	Frame type sensor LAG-M 20/20 – cable-length = 1m
51019269	LAG-M20/25	Frame type sensor LAG-M 20/25 – cable-length = 1m
51019270	LAG-M20/40	Frame type sensor LAG-M 20/40 – cable-length = 1m
51019271	LAG-M20/50	Frame type sensor LAG-M 20/50 – cable-length = 1m
51019251	FLB-CON 1-Q	Amplifier for LAG-M light barrier with PNP dyn.
51019252	LAG-CON 1	Connecting cable 2m for FLB-CON 1-Q (open end)
641040080020	CCB LAG-M V*WZS (4B/7S)	Connecting cable 2m for FLB-CON 1-Q with 7pin plug.



PRODUKTINFORMATION

© by TRsystems GmbH • Nachdruck, auch auszugsweise, nicht zulässig. Änderungen in Technik und Design vorbehalten • LAG-M20-Series

TRsystems GmbH
Freiburger Str. 3
D-75179 Pforzheim

Tel +49(0)7231/3152-0
Fax +49(0)7231/3152-99
unidor@trsystems.de
www.trsystems.de